



HEBEI DINGSHENG MACHINERY MANUFACTURE CO.,LTD

Instruction of loop tie wire machine



Loop tie wire machine is coated with PVC to create a strong, easy-to-use twist wire tie. PVC coating will not crack, chip or scratch off when tying; meantime this coating provides protection against rust and corrosion. It is widely used for tying and support of plants in gardens or other binding uses, such as tying of sacks and other bagging. This kind of wire is also widely used in securing the position of reinforcing bars during concrete placement.

Product Description

- 1.Wire gauge:** 0.8MM-2.2MM
- 2.Wire Length:** 4"-20"
- 3.Wire Material:** Black Annealed Iron Wire Galvanized Iron Wire And PVC Coated Iron Wire
- 4.Dimension:** 1270*800*1300mm
- 5.Weight:** 350kg
- 6.Capacity:** 85 roots/min



Generally one worker can care four sets tie wire machine





HEBEI DINGSHENG MACHINERY MANUFACTURE CO.,LTD

Packing



1. Wire Entrance






HEBEI DINGSHENG MACHINERY MANUFACTURE CO.,LTD

2.CNC Operation



3.Adjust tie wire length

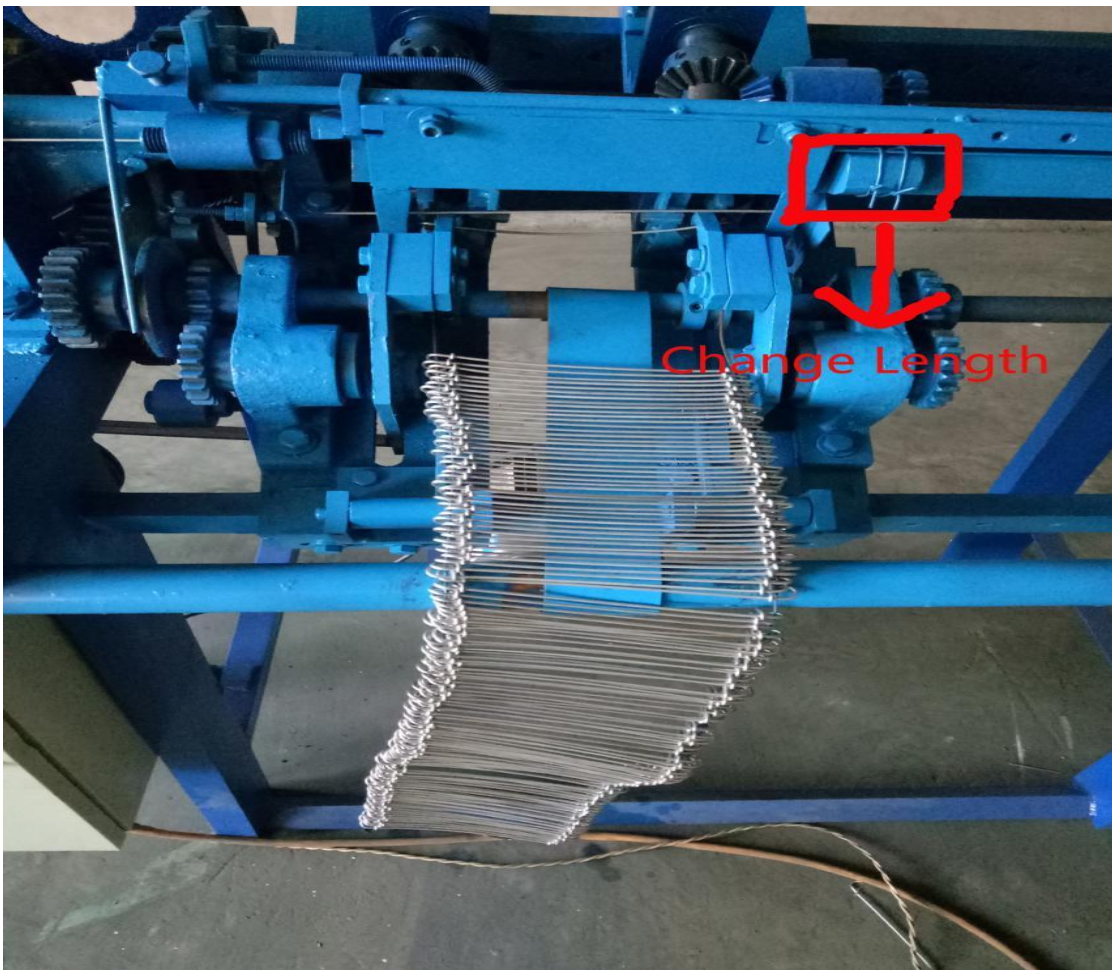

Loop tie wire

Packing:

- 1) 1000pcs per bundle, 4 or 5 bundles per bag, then several bags to be packed in pallet.
- 2) 4000 or 5000pcs per bundle/bag, several bags to be packed in pallet.
- 3) 2lbs or 5lbs per bundle, 25bundles or 10 bundles per box.
- 4) 50lbs per bundle, 20 bundles per bag.

